

Introduction

The Spectrum24 LA-4113 PCI adapter allows a Spectrum24 wireless network to configure, connect to and establish a Spectrum24 wireless network.

Features include:

- Standard NDIS (Network Driver Interface Specification) drivers
- Windows 95, 98, NT 4.0 and CE driver support
- Plug and Play support
- Card and Socket Services Support.

Scope

This Getting Started Guide contains LA-4113 PCI adapter installation and configuration instructions for Windows 95/98 and NT. For instructions on using the Spectrum24 Plus Pack utilities, refer to the Spectrum24 Plus Pack Users Guide (70-20709-01).

Installing the PCI Adapter

The physical PCI adapter installation differs for each system. Refer to the system manufacturer documentation for specific information.

Preparation

Before beginning the installation, verify the package contains:

- Spectrum24 LA-4113 PCI adapter
- installation CD.

Note: Verify the model indicated on the PCI adapter and packaging before use. Contact the Symbol Support Center if an item is missing or not functioning.

Installation

The Spectrum24 PCI adapter installation requires:

- a computer with a PCI slot
- a CDROM drive
- an available interrupt (IRQ)
- an available I/O port address
- Spectrum24 driver installation CD

Note: Installation and removal methods vary for different host devices. Refer to system documentation for information.

Introduction

The Spectrum24 LA-4113 PCI adapter allows a Spectrum24 wireless network to configure, connect to and establish a Spectrum24 wireless network.

Features include:

- Standard NDIS (Network Driver Interface Specification) drivers
- Windows 95, 98, NT 4.0 and CE driver support
- Plug and Play support
- Card and Socket Services Support.

Scope

This Getting Started Guide contains LA-4113 PCI adapter installation and configuration instructions for Windows 95/98 and NT. For instructions on using the Spectrum24 Plus Pack utilities, refer to the Spectrum24 Plus Pack Users Guide (70-20709-01).

Installing the PCI Adapter

The physical PCI adapter installation differs for each system. Refer to the system manufacturer documentation for specific information.

Preparation

Before beginning the installation, verify the package contains:

- Spectrum24 LA-4113 PCI adapter
- installation CD.

Note: Verify the model indicated on the PCI adapter and packaging before use. Contact the Symbol Support Center if an item is missing or not functioning.

Installation

The Spectrum24 PCI adapter installation requires:

- a computer with a PCI slot
- a CDROM drive
- an available interrupt (IRQ)
- an available I/O port address
- Spectrum24 driver installation CD

Note: Installation and removal methods vary for different host devices. Refer to system documentation for information.

Installing and Configuring the Spectrum24 Driver in Windows 95/98

The PCI adapter is ready to be configured.

1. Attach the antenna cable to the antenna connector on the PCI adapter.

To attach the antenna:

The PCI adapter includes a desktop antenna.

External Antenna Slot

Verify the adapter seats into the slot evenly.

5. Align the adapter with the slot and insert firmly.
4. Remove the retaining screw and bracket for the slot.

3. Locate an available PCI slot in the computer.

2. Remove the computer cover.

second controller.

If the system has a PCMCIA adapter installed, the PCI adapter can function as a

1. Power off the computer before installing the adapter.

computer components.

CAUTION! Use proper grounding for the environment when handling

To install the PCI adapter:

Copyright

Copyright © 1999 by Symbol Technologies, Inc. All rights reserved.

No part of this publication may be modified or adapted in any way, for any purposes without permission in writing from Symbol. The material in this manual is subject to change without notice.

Symbol reserves the right to make changes to any product to improve reliability, function, or design.

No license is granted, either expressly or by implication, estoppel, or otherwise under any Symbol Technologies, Inc., intellectual property rights. An implied license only exists for equipment, circuits, and subsystems contained in Symbol products. Symbol, the Symbol logo and Spectrum24 are registered trademarks of Symbol Technologies, Inc.

Other product names mentioned in this manual may be trademarks or registered trademarks of their respective companies and are hereby acknowledged.

IBM is a registered trademark of International Business Machine Corporation.

Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation.

Novell and LAN Workplace are registered trademarks of Novell Inc.

Toshiba is a trademark of Toshiba Corporation.

Patents

This product is covered by one or more of the following U.S. and foreign Patents:

U.S. Patent No. 4,360,798; 4,369,361; 4,387,297; 4,460,120; 4,496,831; 4,593,186; 4,603,262; 4,607,156; 4,652,750; 4,673,805; 4,736,095; 4,758,717; 4,816,660; 4,845,350; 4,896,026; 4,897,532; 4,923,281; 4,933,538; 4,992,717; 5,015,833; 5,017,765; 5,021,641; 5,029,183; 5,047,617; 5,103,461; 5,113,445; 5,130,520; 5,140,144; 5,142,550; 5,149,950; 5,157,687; 5,168,148; 5,168,149; 5,180,904; 5,229,591; 5,230,088; 5,235,167; 5,243,655; 5,247,162; 5,250,791; 5,250,792; 5,262,627; 5,262,628; 5,266,787; 5,278,398; 5,280,162; 5,280,163; 5,280,164; 5,280,498; 5,304,786; 5,304,788; 5,306,900; 5,321,246; 5,324,924; 5,337,361; 5,367,151; 5,373,148; 5,378,882; 5,396,053; 5,396,055; 5,399,846; 5,408,081; 5,410,139; 5,410,140; 5,412,198; 5,418,812; 5,420,411; 5,436,440; 5,444,231; 5,449,891; 5,449,893; 5,468,949; 5,471,042; 5,478,998; 5,479,000; 5,479,002; 5,479,441; 5,504,322; 5,519,577; 5,528,621; 5,532,469; 5,543,610; 5,545,889; 5,552,592; 5,578,810; 5,581,070; 5,589,679; 5,589,680; 5,608,202; 5,612,531; 5,619,028; 5,664,229; 5,668,803; 5,675,139; 5,693,929; 5,698,835; 5,705,800; 5,714,746; 5,723,851; 5,734,152; 5,734,153; 5,745,794; 5,754,587; 5,762,516; 5,763,863; 5,767,500; 5,789,728; 5,808,287; 5,811,785; 5,811,787; 5,815,811; 5,821,519; 5,821,520; 5,823,812; 5,828,050; 5,850,078; 5,861,615; 5,874,720; 5,875,415; 5,900,617; 5,902,989; 5,907,146; 5,912,450; 5,914,478; 5,917,173; 5,920,059; 5,923,025; 5,929,420; 5,945,658; 5,945,659; 5,946,194; 5,959,285; D305,885; D341,584; D344,501; D359,483; D362,453; D363,700; D363,918; D370,478; D383,124; D391,250; D405,077; D406,581; D414,171; D414,172

Invention No. 55,358; 62,539; 69,060; 69,187 (Taiwan); No. 1,601,796; 1,907,875; 1,955,269 (Japan); European Patent 367,299; 414,281; 367,300; 367,298; UK 2,072,832; France 81/003938; Italy 1,138,713


Symbol Technologies, Inc.
One Symbol Plaza
Holtzville, NY
11742-1300



70-20746-01
Revision A

Spectrum24[®]

Wireless LAN Adapter LA-4113 PCI Adapter Quick Reference Guide

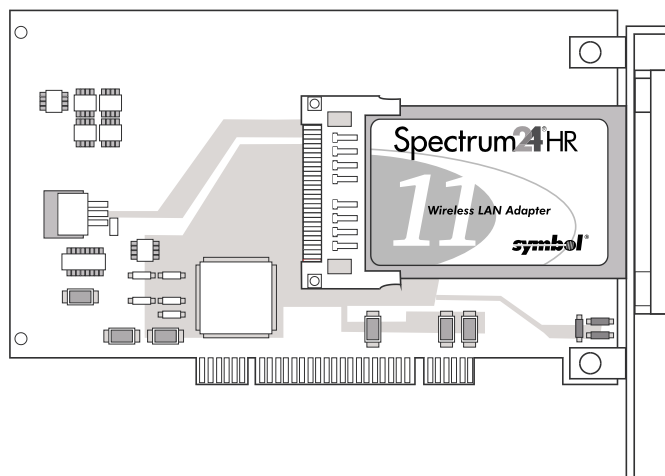

symbol[®]
www.symbol.com

Installing the Driver in Windows 95

To install the driver for the first time in Windows 95:

Note: The Spectrum24 Windows driver ships with the Symbol Network Control Panel Applet (NCPA) utility. Use NCPA to view and configure Spectrum24 LA-4113 PCI adapter settings.

1. Install the Spectrum24 PCI adapter as described in the installation section.
2. Power up the system.
3. Insert the Spectrum24 Windows driver installation CD.
4. When Windows 95 recognizes the PCI adapter, an Update Device Driver Wizard dialog box appears requesting a driver to install. Click Next.
5. Click Finish when Windows displays the following message:
Windows found the following updated driver for this device: Symbol Spectrum24 PCI adapter.

Complete the installation instructions displayed by the Windows 95 operating system.

6. Enter the network ESSID in the Symbol Easy Setup window. Click OK.
7. Click Finish.
8. When prompted, reboot the computer.

Installing the Driver in Windows 98

To install the driver for the first time in Windows 98:

Note: The Spectrum24 Windows driver ships with the Symbol Network Control Panel Applet (NCPA) utility. Use NCPA to view and configure Spectrum24 LA-4113 PCI adapter settings.

1. Install the Spectrum24 PCI adapter as described in the installation section.
2. Power up the system.
3. Insert the Spectrum24 Windows driver installation CD.
4. When Windows 98 recognizes the PCI adapter, the Add New Hardware dialog box appears. Click Next.
5. Select Search for best driver for your device. Click Next.
6. Select the location of the installation CDROM. Click Next.
7. Click Next when Windows displays Spectrum24 WLAN PCI Adapter.
8. Enter the network ESSID in the Symbol Easy Setup window. Click OK.
9. Click Finish.
10. When prompted, reboot the computer.

Configuring the LA-4113 PCI Adapter for Windows 95/98

To configure the PCI adapter for Windows 95/98 support:

1. From the Windows 95/98 Control Panel, select Network and select Symbol PC Card. Click on the Properties tab.
2. From the Symbol Easy Setup window, click the Advanced button to view the PCI adapter settings.
Use the NCPA Mobile Unit, Mobile IP, Encryption and WLAN Adapter tabs to view or adjust the adapter configuration settings.
3. Exit and save the configuration settings by clicking OK or Finish. Select Cancel to use the default settings.
4. Restart the system for the changes to take effect.

Installing and Configuring the Spectrum24 Driver in Windows NT

The Spectrum24 Windows driver ships with the Network Control Panel Applet (NCPA) utility. Use NCPA to view and edit Spectrum24 LA-4113 PCI adapter settings.

Before installing the Spectrum24 32-bit Windows driver:

- update the system BIOS
- enable PCMCIA services
- obtain the correct Windows installation media
- verify the Spectrum 24 LA-4113 PCI adapter is installed
- obtain the Spectrum24 Windows driver installation CD

Symbol recommends updating the Spectrum 24 LA-4113 PCI adapter to the latest firmware. Use the NICUpdate utility to update the firmware. Refer to the documentation shipped with the Spectrum24 Plus Pack utility suite for instructions on using NICUpdate. To download the latest firmware, go to www.symbol.com and search for firmware and software downloads.

Installing the Driver in Windows NT

To install the driver for the first time in Windows NT:

Note: The Spectrum24 Windows driver ships with the Symbol Network Control Panel Applet (NCPA) utility. Use NCPA to view and configure Spectrum24 adapter settings.

Note: For instructions on installing the driver in a system with an existing Spectrum24 WLAN adapter, refer to the Spectrum24 Wireless LAN Adapter Models LA-4111 PC Card and Adapter Product Reference Guide (70-20706-01).

1. Install the PCI adapter as described in the installation section.
2. Power up the system.
3. Insert the Spectrum24 Windows driver installation CD.
4. From the Windows NT Control Panel, select Network.
5. Select the Adapters tab. Click Add.
6. Click Have Disk.
7. Enter the drive letter assigned to the CD drive. Click OK.
8. When the Select OEM Option dialog box appears, select the Symbol PCI adapter. Click OK.
9. Enter the network ESSID in the Symbol Easy Setup window. Click OK. The Network dialog box appears.
10. Click Close, and complete the installation instructions displayed by the Windows NT operating system.
11. Reboot the computer when prompted by Windows NT.

Configuring the LA-4113 PCI Adapter for Windows NT

To configure the PCI adapter for Windows NT support:

1. From the Windows NT Control Panel, click on the Network icon, select the Adapters tab and select Symbol PC Card. Click on the Properties tab.
2. From the Symbol Easy Setup window, click the Advanced button to view the PCI adapter settings.
Use the NCPA Mobile Unit, Mobile IP, Encryption and WLAN Adapter tabs to view or adjust the adapter configuration settings.
3. If necessary, configure the hardware and radio parameters.
4. Click OK or Close to exit and save the configuration settings.
5. Remove the Spectrum24 driver installation CD and follow the remaining instructions.
6. Reboot the computer when prompted by Windows NT.

Specifications

The LA-4113 PCI adapter has the following specifications:

- Dimensions: 6 inches x 5 inches
- Weight: 4.3 oz
- Operating Temperature: 32 to 100°
- Humidity: 95% maximum non condensing
- Altitude: Storage - 15,000 ft. (4.6 km) Operating - 8,000 ft. (2.4 km)
- Shock: 40 G, 11 mS, half sine

Customer Support

Symbol Technologies provides its customers with world-class customer service and technical support. The Symbol Support Center operates as the single point of contact for any technical problem, question or support issue.

The Support Center operates all year, 24 hours a day, staffed by full-time professional Technical Specialists.

If Symbol cannot solve the problem immediately within its tiered, technical-support center, access to all technical disciplines within Symbol become available for further assistance and support. First response / contact within 24 hours or one business day. Responses by email, fax or telephone.

North American Contacts

Inside North America, contact Symbol at:

Symbol Technologies, Inc.

One Symbol Plaza

Holtsville, New York 11742-1300

Telephone: 1-516-738-2400 / 1-800-SCAN 234

Fax: 1-516-738-5990

Symbol Support Center:

Telephone: 1-800-653-5350

Fax: (516) 563-5410

Email: support@symbol.com

International Contacts

Outside North America, contact Symbol at:

Symbol Technologies Technical Support

12 Oaklands Park

Berkshire, RG41 2FD, United Kingdom

Tel: 011-44-118-945-7000 or 1-516-738-2400 ext. 6213

Additional Information

Obtain additional information by contacting Symbol at:

1-800-722-6234, inside North America

+1-516-738-5200, in/outside North America

<http://www.symbol.com/>